



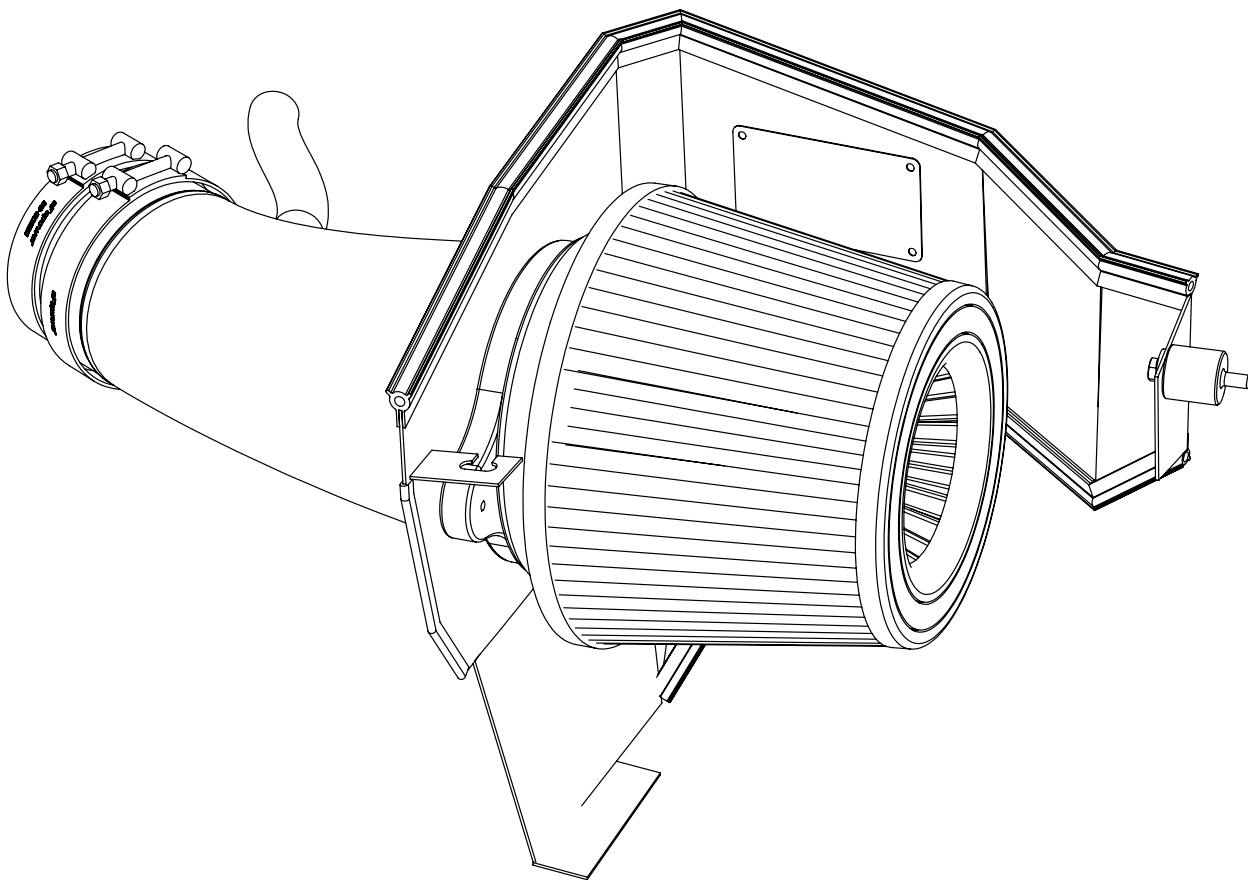

advanced FLOW engineering Track Series Air Intake

Instruction Manual P/N: 51-12172-C / 54-12172-C


Make: **Dodge** Model: **Challenger SRT-8/Charger SRT-8** Year: **2011-2020** Engine: **V8-6.4L HEMI**
Make: **Chrysler** Model: **300 SRT-8** Year: **2012-2014** Engine: **V8-6.4L HEMI**

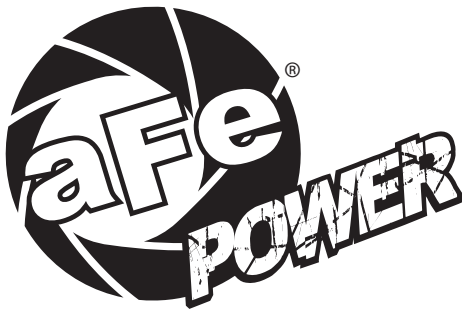

- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- If you are missing any of the components, call customer support at 951-493-7185.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Disconnect the negative battery terminal before proceeding.
- Retain factory parts for future use.

Label	Qty.	Description	Part Number
A1	1	Pro DRY S Air Filter	21-91035 (Gray Media)
A2	1	Pro 5R Air Filter	24-91035 (Blue Media)
B	1	Housing	05-12172B3
C	1	Tube	05-12172C1
D	1	Male/Female Isolation Mount	03-50206
E	3	Washer, Lock	03-50071
F	3	Screw, Hex Hd: M6x1x12	03-50032
G	3	Washer, Flat	03-50070
H	1	Clamp, T-Bolt (4-1/8" - 4-1/2")	03-50262
I	1	Clamp, T-bolt (3-9/16"-3-7/8")	03-50498
J	1	Isolation Pad	03-50196
K	1	Coupling, Silicone Reducer	05-01358
L	1	Trim, Rubber Edge (13")	05-00149
M	1	Seal, Trim (25")	05-00072
N	1	Seal, Trim (17")	05-00072
O	1	Hose, Fuel: 3/4"	05-00070

Note: Legal in California for use on race vehicles only. The use of this device on vehicles used on public streets or highways is strictly prohibited in California and others states that have adopted California emission regulations.

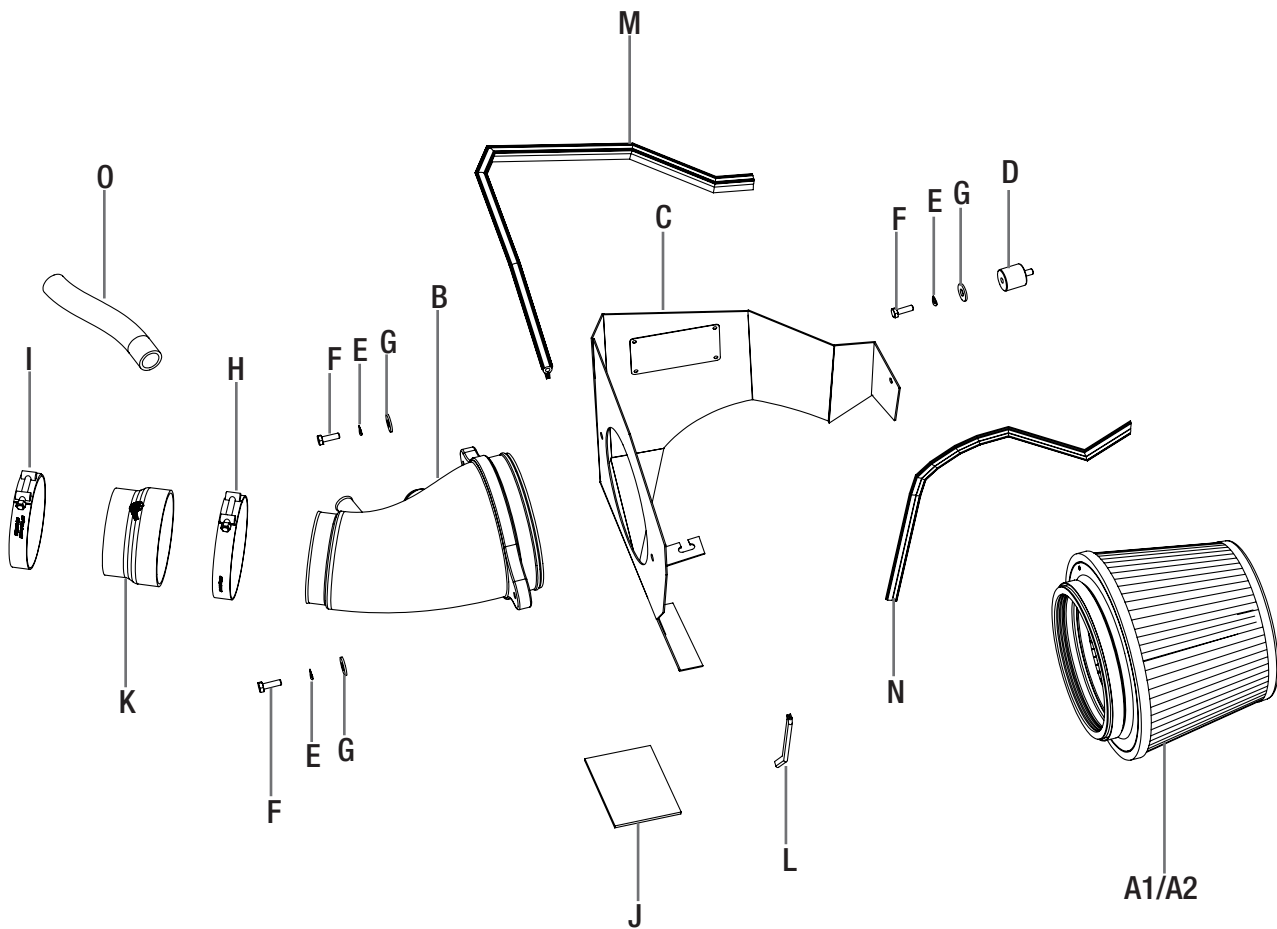



Refer to Figure A for Steps 1-5

Step 1: Remove 8mm bolt securing the factory air box, this bolt will be reused to secure the aFe housing.

Step 2: Loosen clamp securing the factory intake tube to throttle body.

Step 3: Unplug Temp sensor connector and leave the sensor in the factory tube for now.

Step 4: Remove driver side engine valve cover, and remove crank case hose. The hose will be replaced with a new one.

Step 5: Remove factory air intake system from engine bay.



Refer to Figure B for Steps 6-7

Step 6: Remove 10mm bolt from fender side, it will not be reused.

Step 7: Install isolation mount onto fender well



INSTALL



Figure C

Refer to Figure C for Steps 8-10

Step 8: Remove grommet and metal sleeve from factory housing and install on aFe housing.

Step 9: Install the provided seal trim onto the outer edges of the aFe housing and install foam pad where housing rests.

Step 10: Install housing onto vehicle. Using one provided 10mm bolt, lock washer, and flat washer secure the housing to the isolation mount installed in Step 7. Put the factory 8mm bolt removed in Step 1 back in its original location.



Figure D

Refer to Figure D for Step 11

Step 11: Install silicone coupling and clamps onto aFe tube, tighten the clamp onto the tube only, leave the throttle body clamp loose.



Figure E

Refer to Figure E for Steps 12-14

- Step 12: Install tube onto vehicle by passing it through the opening in the housing, and sliding the coupling over the throttle body.
- Step 13: Use the remaining two 10mm bolts, lock washers, and flat washers to secure the tube to the housing.
- Step 14: Tighten clamp at the throttle body.



Figure F

Refer to Figure F for Steps 15-18

Step 15: Remove the Temperature sensor from factory tube and install onto in aluminum fitting into the aFe Power tube. Reconnect the harness to the Temperature sensor.

Step 16: Install supplied crank case hose between the aFe Power tube and the valve cover

Step 17: Install filter onto intake tube and tighten the filter clamp.

Step 18: Reinstall the valve cover and your install is complete.

NOTE: Check all bolts, clamps, and connectors after 100-200 miles.



Pro DRY S Air Filter



P/N: 21-91035

Pro 5R Air Filter



P/N: 24-91035

Pro DRY S Restore Kit



P/N: 90-59999

Blue Squeeze Restore Kit



P/N: 90-50501

Sprint Booster V3



P/N: 77-12002

Long Tube Headers &
Connection Pipes




P/N: 48-32007-YC (Street)
48-32007-YN (Race)

Shorty Headers



P/N: 48-42002

Header Connection Pipes



P/N: 48-42005 (Street)
48-42006 (Race)

Throttle Body Spacer



P/N: 46-32007

Exhaust System



P/N: 49-42028 (Challenger)

To purchase any of the items above, view airflow charts, dyno graphs, photos, and video; please go to aFepower.com.


Warranty

General Terms:

- aFe warrants their products to be free from manufacturer's defects due to workmanship and material.
- This warranty applies only to the original purchaser of the product and is non-transferrable.
- Proof of purchase of the aFe product is required for all warranty claims.
- Warranty is valid provided aFe instructions for installation and/or cleaning were properly followed.
- Proper maintenance with regular inspections of product is required to insure warranty coverage.
- Damage due to improper installation, abuse, unauthorized repair or alteration is not warranted.
- Incidental or consequential damages or cost, including installation and removal of part, incurred due to failure of aFe product is not covered under this warranty.
- All warranty is limited to the repair and/or replacement of the aFe part. To request Return Goods Authorization ("RGA"), email RGA@afepower.com or call (951)493-7100. Upon receipt of the RGA, you must return the product to the address provided in the RGA, freight prepaid and accompanied with a dated proof of purchase and the RGA. Upon receipt of the defective product and upon verification of proof of purchase, aFe will either repair or replace the defective product within a reasonable time, not to exceed thirty days.

Product Category	P/N Prefix	Warranty duration
Direct OE Replacement Filters	10, 11, 30, 31, 71, 73	Life of the vehicle
Racing Filters	18	1 year
Universal	21, 24, 72	2 years
Air Intake Systems	50, 51, 54, 55, 75	2 years
Exhaust Systems	49	2 years
Intercoolers & Intercooler Tubes	46-2	2 years
Intake Manifolds	46-1	2 years
Differential Cover	46-7	Life of the vehicle
Exhaust Manifolds	46	2 years
Throttle Body Spacers	46-3	2 years
Fluid Filters	44	90 days
Pre-Filters	28	2 years
Heavy Duty OE Replacement	70	2 years
PowerSports OE Replacement	81, 87	2 years
PowerSports Intake Systems	85	2 years

No other warranty expressed or implied applies nor is any person or advanced FLOW engineering authorized to assume any other warranty. Some States do not allow the exclusion or limitation of incidental or consequential damages or do not allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

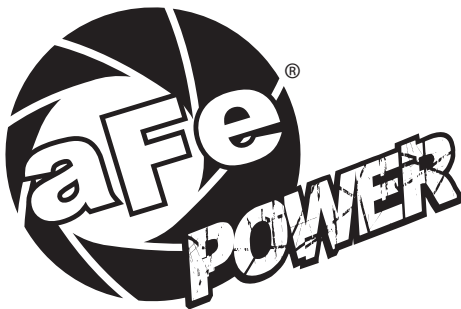

advanced FLOW engineering, inc.

252 Granite Street Corona, CA 92879

TEL: 951.493.7100 • TECH: 951.493.7185

E-Mail: Tech@aFepower.com